

GL865-DUAL/QUAD Product Description

80370ST10080A Rev.3 – 2013-01-09



*SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE***Notice**

While reasonable efforts have been made to assure the accuracy of this document, Telit assumes no liability resulting from any inaccuracies or omissions in this document, or from use of the information obtained herein. The information in this document has been carefully checked and is believed to be entirely reliable. However, no responsibility is assumed for inaccuracies or omissions. Telit reserves the right to make changes to any products described herein and reserves the right to revise this document and to make changes from time to time in content hereof with no obligation to notify any person of revisions or changes. Telit does not assume any liability arising out of the application or use of any product, software, or circuit described herein; neither does it convey license under its patent rights or the rights of others.

It is possible that this publication may contain references to, or information about Telit products (machines and programs), programming, or services that are not announced in your country. Such references or information must not be construed to mean that Telit intends to announce such Telit products, programming, or services in your country.

Copyrights

This instruction manual and the Telit products described in this instruction manual may be, include or describe copyrighted Telit material, such as computer programs stored in semiconductor memories or other media. Laws in the Italy and other countries preserve for Telit and its licensors certain exclusive rights for copyrighted material, including the exclusive right to copy, reproduce in any form, distribute and make derivative works of the copyrighted material. Accordingly, any copyrighted material of Telit and its licensors contained herein or in the Telit products described in this instruction manual may not be copied, reproduced, distributed, merged or modified in any manner without the express written permission of Telit. Furthermore, the purchase of Telit products shall not be deemed to grant either directly or by implication, estoppel, or otherwise, any license under the copyrights, patents or patent applications of Telit, as arises by operation of law in the sale of a product.

Computer Software Copyrights

The Telit and 3rd Party supplied Software (SW) products described in this instruction manual may include copyrighted Telit and other 3rd Party supplied computer programs stored in semiconductor memories or other media. Laws in the Italy and other countries preserve for Telit and other 3rd Party supplied SW certain exclusive rights for copyrighted computer programs, including the exclusive right to copy or reproduce in any form the copyrighted computer program. Accordingly, any copyrighted Telit or other 3rd Party supplied SW computer programs contained in the Telit products described in this instruction manual may not be copied (reverse engineered) or reproduced in any manner without the express written permission of Telit or the 3rd Party SW supplier. Furthermore, the purchase of Telit products shall not be deemed to grant either directly or by implication, estoppel, or otherwise, any license under the copyrights, patents or patent applications of Telit or other 3rd Party supplied SW, except for the normal non-exclusive, royalty free license to use that arises by operation of law in the sale of a product.



Usage and Disclosure Restrictions

License Agreements

The software described in this document is the property of Telit and its licensors. It is furnished by express license agreement only and may be used only in accordance with the terms of such an agreement.

Copyrighted Materials

Software and documentation are copyrighted materials. Making unauthorized copies is prohibited by law. No part of the software or documentation may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language or computer language, in any form or by any means, without prior written permission of Telit

High Risk Materials

Components, units, or third-party products used in the product described herein are NOT fault-tolerant and are NOT designed, manufactured, or intended for use as on-line control equipment in the following hazardous environments requiring fail-safe controls: the operation of Nuclear Facilities, Aircraft Navigation or Aircraft Communication Systems, Air Traffic Control, Life Support, or Weapons Systems (High Risk Activities"). Telit and its supplier(s) specifically disclaim any expressed or implied warranty of fitness for such High Risk Activities.

Trademarks

TELIT and the Stylized T Logo are registered in Trademark Office. All other product or service names are the property of their respective owners.

Copyright © Telit Communications S.p.A.



APPLICABLE PRODUCTS

The information contained in this document is referred to the following products:

PRODUCT
GL865-DUAL
GL865-QUAD



Contents

1. Introduction	8
1.1. Scope	8
1.2. Audience.....	8
1.3. Contact Information, Support.....	8
1.4. Document Organization	8
1.5. Text Conventions	9
1.6. Related Documents	9
2. The GL865-DUAL/QUAD	10
2.1. Product Overview	10
2.2. Target Market	10
2.3. Product Features	11
3. Product Description.....	15
3.1. Size and 2D mechanical drawing	15
3.2. Weight	15
3.3. Environmental requirements	16
3.3.1. Temperature range	16
3.3.2. RoHS compliance	16
3.4. Operating Frequency	16
3.5. Transmitter output power	16
3.6. Receiver sensitivity	17
3.7. Antenna	17
3.8. Supply voltage.....	17
3.9. Power consumption	17
3.10. The user interface	18
3.11. Speech CODEC	18
3.12. SIM Reader.....	18
3.13. SMS	18
3.14. Real Time Clock and Alarm.....	18
3.15. Enhanced Measurement Report.....	19
3.16. Data transmission capabilities	19



3.17.	Local security management	19
3.18.	Call control	19
3.19.	Phonebook	19
3.20.	Characters management.....	19
3.21.	SIM related functions	19
3.22.	Call status indication	19
3.23.	Automatic answer (Voice, Data)	19
3.24.	Supplementary services (SS)	20
3.25.	Acoustic signaling	20
3.26.	Buzzer output.....	20
3.27.	RF Transmission Monitor (RFTXMON)	21
3.28.	RF Transmission Control.....	21
3.29.	TTY (Telephone Text).....	21
3.30.	Logic level specifications	21
3.31.	Audio	21
3.31.1.	Analog.....	21
3.31.2.	Digital	21
3.32.	Serial Ports.....	21
3.33.	Converters.....	22
3.33.1.	ADC Converter	22
3.33.2.	DAC Converter	22
3.34.	Mounting the GL865-DUAL/QUAD on your Board	22
3.35.	Packing system	22
4.	Evaluation Kit.....	23
5.	Software Features	24
5.1.	IP Easy Extension.....	24
5.1.1.	Overview.....	24
5.2.	Multisocket.....	24
5.3.	Jamming Detection.....	25
5.3.1.	Overview.....	25
5.4.	CMUX.....	25
5.4.1.	Architecture.....	25
5.4.2.	Features.....	25



5.5.	Easy Script Extension - Python interpreter	26
5.5.1.	Overview	26
5.5.2.	Python 1.5.2+ Copyright Notice	27
5.6.	SAP: SIM Access Profile	27
5.6.1.	Architecture.....	27
5.6.2.	Implementation features.....	28
5.6.3.	Remote SIM Message Command Description	28
5.7.	Premium FOTA Management (PFM) Service	29
5.7.1.	FOTA (Firmware Over The Air)	29
5.8.	eCall Compliance (GL865-QUAD only)	29
5.9.	AT Commands	30
6.	Conformity Assessment Issues	31
6.1.	GE865-DUAL/QUAD CE Declaration of Conformity.....	31
6.2.	GL865- QUAD FCC Certificate	33
6.3.	GL865-QUAD IC Certificate.....	34
6.4.	GL865-DUAL/QUAD RoHs Declaration of Conformity.....	35
7.	SAFETY RECOMMENDATIONS	36
8.	List of acronyms	37
9.	Document History.....	39



1. Introduction

1.1. Scope

Scope of this document is giving an overview of the Telit GL865-DUAL/QUAD module, which is a very small GSM/GPRS module with data and voice capabilities.

1.2. Audience

This document is intended for customers who are evaluating the GL865-DUAL/QUAD.

1.3. Contact Information, Support

For general contact, technical support, to report documentation errors and to order manuals, contact Telit's Technical Support Center (TTSC) at:

TS-EMEA@telit.com
TS-NORTHAMERICA@telit.com
TS-LATINAMERICA@telit.com
TS-APAC@telit.com

Alternatively, use:

<http://www.telit.com/en/products/technical-support-center/contact.php>

For detailed information about where you can buy the Telit modules or for recommendations on accessories and components visit:

<http://www.telit.com>

To register for product news and announcements or for product questions contact Telit's Technical Support Center (TTSC).

Our aim is to make this guide as helpful as possible. Keep us informed of your comments and suggestions for improvements.

Telit appreciates feedback from the users of our information.

1.4. Document Organization

This document contains the following chapters:

[“Chapter 1: “Introduction”](#) provides a scope for this document, target audience, contact and support information, and text conventions.

[“Chapter 2: “The GL865-DUAL/QUAD”](#) gives an overview of the features of the product.



[“Chapter 3: “Product Description”](#) describes in details the characteristics of the product.

[“Chapter 4: “Evaluation Kit”](#) provides some basic information about the Evaluation Kit.

[“Chapter 5: “Software Features”](#) provides an overview of the software features of the products.

[“Chapter 6: “Conformity Assessment Issues”](#) provides some fundamental hints about the conformity assessment that the final application might need.

[“Chapter 7: “Safety Recommendation”](#) provides some safety recommendations that must be follow by the customer in the design of the application that makes use of the GL865.

[“Chapter 8: “List of acronyms”](#)

[“Chapter 9: “Document history”](#)

1.5. Text Conventions



Danger – This information MUST be followed or catastrophic equipment failure or bodily injury may occur.



Caution or Warning – Alerts the user to important points about integrating the module, if these points are not followed, the module and end user equipment may fail or malfunction.



Tip or Information – Provides advice and suggestions that may be useful when integrating the module.

All dates are in ISO 8601 format, i.e. YYYY-MM-DD.

1.6. Related Documents

- Hardware User Guide
- Software User Guide
- AT Command User Guide
- CMUX User Guide
- SAP User Guide
- Easy Script User Guide
- Audio Settings User Guide
- IP Easy User Guide



2. The GL865-DUAL/QUAD

2.1. Product Overview

The new GL865-DUAL/QUAD product introduces the smallest GSM/GPRS Leadless-Chip-Carrier (LCC) module in the market.

The GL865-DUAL/QUAD incorporating a single-chip solution built on SMD technology into a 24,4 x 24,4 x 2,7 mm block.

The low profile and small size of the unique LCC package for the GL865-DUAL/QUAD enable the design of extremely compact applications. Since connectors are eliminated, the solution cost is significantly reduced compared to conventional mounting.

With its ultra-compact design and extended temperature range, the Telit GL865-DUAL/QUAD product is the perfect platform for high-volume m2m applications and mobile data devices. Additional features such as integrated TCP/IP protocol stack and serial multiplexer extend functionality of the application at no additional cost.

The Telit GL865-DUAL is dual band GSM/GPRS module in 900 and 1800 MHz.

The Telit GL865-QUAD is Quad band GSM/GPRS module in 850/900/1800/1900 MHz.

Moreover, the Telit GL865-QUAD is compliance with eCall European directive.

The GL865-DUAL/QUAD makes it possible to run the customer's application inside the module using Python Script Interpreter, thus making it the smallest, complete platform for m2m solutions.

The GL865-DUAL/QUAD module, support Over-the-Air firmware update by means Premium FOTA Management. By embedding the RedBend's vCurrent Mobile® agent, a proven and battle-tested technology powering hundreds of millions of cellular handsets world-wide, Telit is able to update its products by transmitting only a delta file, which represents the difference between one firmware version and another.

2.2. Target Market

The GL865-DUAL/QUAD is designed and developed for the usage in applications such as:

- Telemetry
- Telematics
- Security alarms
- Automated Meter Reading (AMR)
- POS terminals
- PDAs and Mobile Computing
- Automotive and Fleet Management applications



2.3. Product Features

- GL865-DUAL: Dual-band EGSM 900 / 1800 MHz
- GL865-QUAD: Quad-band EGSM 850 / 900 / 1800 / 1900 MHz
- GSM/GPRS protocol stack 3GPP Release 4 compliant
- Output power
 - Class 4 (2W) @ 850/900 MHz
 - Class 1 (1W) @ 1800/1900 MHz
- Control via AT commands according to 3GPP 27.005, 27.007 and Telit custom AT commands
- Control via Remote AT commands
- Power consumption (typical values)
 - Power off: < 62 uA
 - Idle (registered, power saving): 1.6 mA @ DRX=9
- Serial port multiplexer 3GPP 27.010
- SIM Application Toolkit 3GPP TS 51.014
- SIM Access Profile
- eCall Compliant (only GL865-QUAD)
- Extended Supply voltage range: 3.22 – 4.5 V DC (3.8 V DC nominal)
- TCP/IP stack access via AT commands
- Sensitivity:
 - ≤ -108 dBm (typ.) @ 850/900 MHz
 - ≤ -107 dBm (typ.) @ 1800/1900 MHz
- DARP/SAIC support
- Enhanced Measurement Report support
- Dimensions: 24,4 x 24,4 x 2,7 mm
- Weight: 3.5 grams
- Extended temperature range
 - 40°C to +85°C (operational)
 - 40°C to +85°C (storage temperature)
- RoHS compliant

Interfaces

- 8 I/O ports maximum



- Analog audio (balanced)
- Digital Voice Interface
- 2 A/D plus 1 D/A converters
- Buzzer output
- ITU-T V.24 serial link through CMOS UART:
 - Baud rate from 300 to 115.200 bps
 - Autobauding up to 115.200 bps

Audio

- Telephony, emergency call
- Half rate, full rate, enhanced full rate and adaptive multi rate voice codecs (HR, FR, EFR, AMR)
- Superior echo cancellation & noise reduction
- Multiple audio profiles pre-programmed and fully configurable
- DTMF

Approvals

- Fully type approved conforming with R&TTE directive
- CE, GCF

SMS

- Point-to-point mobile originated and mobile terminated SMS
- Concatenated SMS supported
- SMS cell broadcast
- Text and PDU mode
- SMS over GPRS

Circuit switched data transmission

- Asynchronous non-transparent CSD up to 9.6 kbps
- V.110

GPRS data

- GPRS class 10



- Mobile station class B
- Coding scheme 1 to 4
- PBCCH support
- GERAN Feature Package 1 support (NACC, Extended TBF)

GSM Supplementary Services

- Call forwarding
- Call barring
- Call waiting & call hold
- Advice of charge
- Calling line identification presentation (CLIP)
- Calling line identification restriction (CLIR)
- Unstructured supplementary services mobile originated data (USSD)
- Closed user group

Additional features

- SIM phonebook
- Fixed dialling number (FDN)
- Real Time Clock
- Alarm management
- Network LED support
- IRA, GSM, 8859-1 and UCS2 character sets
- Jamming detection
- Embedded TCP/IP stack, including TCP, IP, UDP, SMTP, ICMP and FTP protocols
- EASY SCAN ® automatic scan over GSM frequencies (also without SIM card)

Python* application resources

- Python* script interpreter (module takes the application code directly in the Python* language)
- Memory: 1.9 MB of NV memory for the user scripts and 1 MB RAM for the Python* engine usage
- Over-the-air application SW update



[*]Copyright © 1991–1995 by Stichting Mathematisch Centrum, Amsterdam, The Netherlands; All Rights Reserved.

Copyright © 1995–2001 Corporation for National Research Initiatives; All Rights Reserved.

Copyright © 2001–2009 Python Software Foundation; All Rights Reserved.

All Rights Reserved are retained in Python.




3. Product Description

3.1. Size and 2D mechanical drawing

The Telit GL865-DUAL/QUAD module overall dimensions are:

- Length: 24,4 mm
- Width: 24,4 mm
- Thickness: 2,7 mm

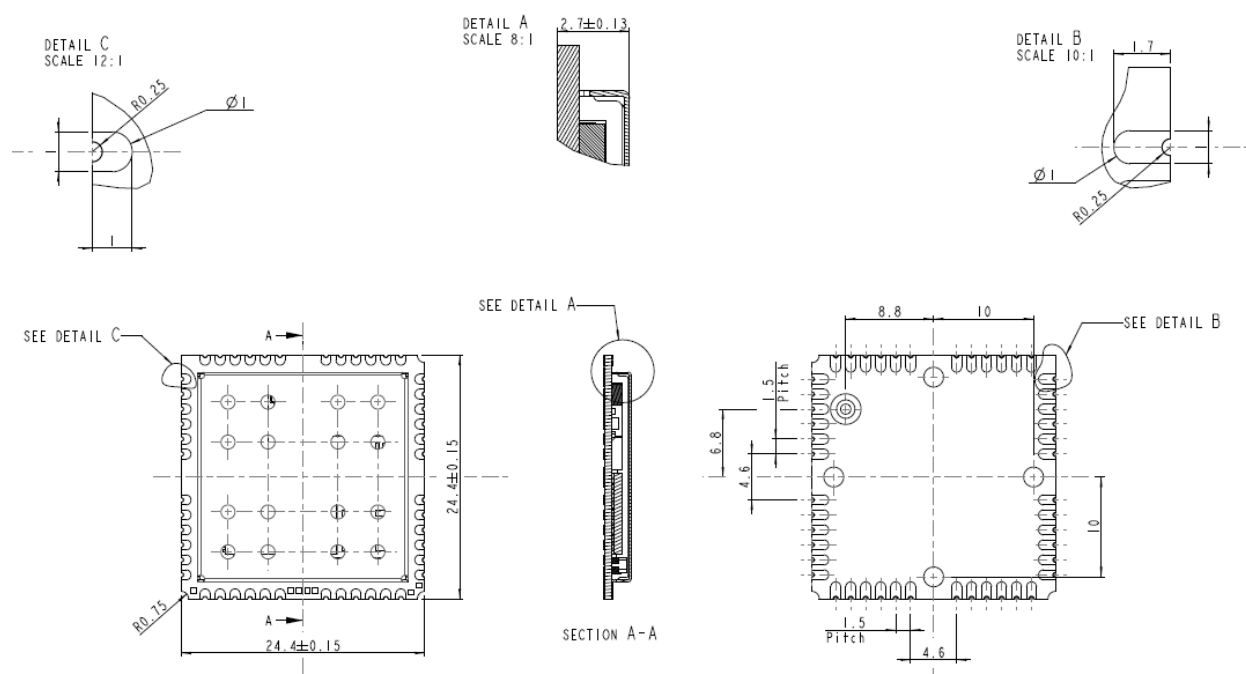

3.2. Weight

The weight of the GL865-DUAL/QUAD is 3.5 grams.



3.6. Receiver sensitivity

Sensitivity of the module in GSM 850/900 band is better than -108 dBm (2.4% BER Class II - static channel) in normal operating conditions.

Sensitivity of the module in GSM 1800/1900 band is better than -107 dBm (2.4% BER Class II - static channel) in normal operating conditions.

The GL865-DUAL/QUAD supports also the Downlink Advance Receiver Performance (DARP) feature for single antenna interference cancellation (SAIC).

3.7. Antenna

The antenna that the customer chooses to use should fulfill the following requirements:

Frequency range	Depending by frequency band(s) provided by the network operator, the customer shall use the most suitable antenna for that/those band(s).
Bandwidth	70 MHz in GSM 850, 80 MHz in EGSM 900, 170 MHz in DCS and 140 MHz in PCS band

For further information please refer to the GL865-DUAL Hardware User Guide.

3.8. Supply voltage

The external power supply must be connected to VBATT signal and must fulfill the following requirements:

Nominal Supply Voltage	3.8 V
Normal Operating Voltage Range	3.4 V – 4.2 V
Extended Operating Voltage Range (*)	3.22 V – 4.5 V

(*) Please refer to the GL865-DUAL/QUAD Hardware User Guide for using the product with the extended operating voltage range.

3.9. Power consumption

The current consumptions of the Telit GL865-DUAL/QUAD in power-off and idle are:

Power off current typical (RTC running)	$< 5 \mu\text{A}$;
Idle registered, power saving	1.5 mA @ DRX=9 (AT+CFUN=5)

Please check the HW User Guide for further details about all other power consumption figures.



3.10. The user interface

The user interface is managed by AT commands according to ITU-T V.250, 3GPP 27.007 and 27.005 specifications. Moreover, custom AT commands are also available. Please refer to the AT Command User Guide for details.

3.11. Speech CODEC

The GL865-DUAL/QUAD supports the following voice codec:

- HR - Half Rate
- FR - Full Rate
- EFR - Enhanced Full Rate
- AMR-HR, AMR Half Rate
- AMR-FR, AMR Full Rate

3.12. SIM Reader

The GL865-DUAL/QUAD supports phase 2 SIM at 1.8V and 3V ONLY with an external SIM connector. For 5V SIM, an external level translator can be added.

3.13. SMS

The GL865-DUAL/QUAD supports the following SMS types:

- Mobile Terminated (MT) class 0 – 3 with signaling of new incoming SMS, SIM full, SMS read
- Mobile Originated class 0 – 3 with writing, saving in SIM and sending
- Cell broadcast compatible with CB DRX with signaling of new incoming SMS.

The GL865-DUAL/QUAD also supports SMS over GPRS

3.14. Real Time Clock and Alarm

The GL865-DUAL/QUAD supports the Real Time Clock and Alarm functions through AT commands. An alarm output pin can be configured to indicate the alarm with a hardware line output.

Furthermore the Voltage Output of the RTC power supply is provided so that a backup capacitor can be added externally to increase the RTC autonomy.



3.15. Enhanced Measurement Report

The GL865-DUAL/QUAD supports the Enhanced Measurement Report on SACCH channel according to 3GPP TS 44.018 version 4.22.0 Release 4 (par. 3.4.1.2, 9.1.54, 9.1.55) and 3GPP TS 45.008 version 4.17.0 Release 4 (par. 8.4.8).

3.16. Data transmission capabilities

The Telit GL865-DUAL/QUAD is a mobile station class B supporting GPRS Class 10, coding schemes 1 to 4 and PBCCH. Moreover, it supports GERAN feature package 1, which consist in supporting the Extended Uplink TBF and Network Assisted Cell Change (NACC).

As for circuit switched data, the GL865-DUAL/QUAD supports asynchronous non-transparent data up to 9.6 Kbps. Moreover, it supports the V.110.

3.17. Local security management

The local security management can be done with the lock of Subscriber Identity module (SIM). The security code will be requested at power-up.

3.18. Call control

The call cost control function is supported.

3.19. Phonebook

This function allows the storing of the telephone numbers in SIM memory. The capability depends on SIM version and its embedded memory.

3.20. Characters management

The GL865-DUAL/QUAD supports the IRA, GSM, 8859-1 and UCS2 characters sets, in TEXT and PDU mode.

3.21. SIM related functions

Fixed Dialing Numbers (FDN), Abbreviated Dialing Number (ADN) and PIN insertion are supported

Extension at the PIN2 for the PUK2 insertion capability for lock condition is supported too.

3.22. Call status indication

The call status indication is supported.

3.23. Automatic answer (Voice, Data)

The automatic answer is supported. The user/application can specify the number of rings after which the module will automatically answer.

The user/application can set the number of rings by means of the command ATSO=<n>.



3.24. Supplementary services (SS)

The following supplementary services are supported:

- Call Barring,
- Call Forwarding,
- Calling Line Identification Presentation (CLIP),
- Calling Line Identification Restriction (CLIR),
- Call Waiting, other party call Waiting Indication,
- Call Hold, other party Hold / Retrieved Indication,
- Closed User Group supplementary service (CUG),
- Advice of Charge,
- Unstructured SS Mobile Originated (MO)

3.25. Acoustic signaling

The acoustic signaling of the GL865-DUAL/QUAD on the selected acoustic device are the following:

- Call waiting;
- Ringing tone;
- SMS received tone;
- Busy tone;
- Power on/off tone;
- Off Hook dial tone;
- Congestion tone;
- Connected tone;
- Call dropped;
- No service tone;
- Alarm tone.

3.26. Buzzer output

A general purpose I/O pin can be configured to output the BUZZER output signal. With an external MOSFET or transistor and a diode, a buzzer can be directly driven.

The ringing tone and the other signaling tones can be redirected to this buzzer output with a specific AT command.



3.27. RF Transmission Monitor (RFTXMON)

As alternate function of the GPIO5, the GL865-DUAL/QUAD can provide the RF transmission monitor. When the alternate function is activated, the pin of GPIO5 changes to HIGH every time the module transmits an RF signal and remains HIGH for the duration of the transmission sequence, i.e. it does not change with every GSM signal burst.

3.28. RF Transmission Control

As alternate function of the GPIO4 pin, when configured as RF Transmission Control Input, it allows to disable the Transmitter when the GPIO is set to Low by the application.

3.29. TTY (Telephone Text)

The TTY feature is supported. Please refer to 3GPP TS 26.226 and 3GPP TS 26.231 for details.

3.30. Logic level specifications

Where not specifically stated, all the interface circuits work at 2.8V CMOS logic levels. To get more detailed information about the logic level specifications used in the GL865-DUAL/QUAD, please check with the Hardware User Guide.

3.31. Audio

3.31.1. Analog

The GL865-DUAL/QUAD offers one audio line balanced. The GL865-DUAL/QUAD has a built-in echo canceller and a noise suppressor. For more details, please refer to the GL865-DUAL/QUAD Hardware User Guide.

3.31.2. Digital

The GL865-DUAL/QUAD offers the digital voice interface. For more details, please refer to the Digital Voice Interface Application Note.

3.32. Serial Ports

Two serial ports are available on the module:

- Main serial port (full RS232), auto-bauding up to 115,200 bps
- AUX serial port (RX & TX only), 115,200 bps



3.33. Converters

3.33.1. ADC Converter

The GL865-DUAL/QUAD has two on board ADC, which are 11-bit converter. They are able to read a voltage level in the range of 0÷2 volts applied on the ADC pin input, store and convert it into 11 bit word.

3.33.2. DAC Converter

The GL865-DUAL/QUAD has one on board DAC, which is a 10 bit converter, able to generate an analogue value based a specific input in the range from 0 up to 1023. However, an external low-pass filter is necessary. See the HW User Guide for the details.

3.34. Mounting the GL865-DUAL/QUAD on your Board

The Telit GL865-DUAL/QUAD module has been designed in order to be compliant with a standard lead-free SMT process. For detailed information about PCB pad design and conditions to use in SMT process please check with the GL865-DUAL/QUAD Hardware User Guide.

3.35. Packing system

The Telit GL865-DUAL/QUAD is supplied on trays of 100 pieces each or, in Tape&Reel of 200 pcs a reel



4. Evaluation Kit

In order to assist the customer in the development of the application, Telit offers the EVK2 Evaluation Kit that can be ordered separately. The EVK2 has a SIM card holder, the RS 232 serial port level translator, a direct UART connection, audio and antenna connector.

The EVK2 provides a fully functional solution for a complete data or phone application. The standard serial RS232 9 pin connector placed on the Evaluation Kit allows the connection of the EVK2 system with a PC or other DTE.

The development of the applications utilizing the Telit GL865-DUAL/QUAD module must present a proper design of all the interfaces towards and from the module (e.g. power supply, audio paths, level translators), otherwise a decrease in the performance will be introduced or, in the worst case, a wrong design can even lead to an operating failure of the module.

In order to assist the hardware designer in his project phase, the EVK2 board presents a series of different solutions, which will cover the most common design requirements on the market, and which can be easily integrated in the OEM design as building blocks or can be taken as starting points to develop a specific one.

For a detailed description of the Telit Evaluation Kit, please refer to the documentation provided with the Telit GL865-DUAL/QUAD Hardware User Guide and EVK2 User Manual.



For more detailed information please consult the IP Easy User Guide.

5.3. Jamming Detection

5.3.1. Overview

The Jammed Detect feature allows the GL865-DUAL/QUAD to detect the presence of a disturbing device such as a Communication Jammer and give indication to the user.

This feature can be very important in alarm, security and safety applications that rely on the module for the communications. In these applications, the presence of a Jammer device can compromise the whole system reliability and functionality and therefore shall be recognized and reported to the local system for countermeasure actions.

5.4. CMUX

CMUX (Converter-Multiplexer) is a multiplexing protocol implemented in the GL865-DUAL/QUAD that can be used to send any data, SMS, or TCP data.

5.4.1. Architecture

The Multiplexer mode enables one serial interface to transmit data to four different customer applications. This is achieved by providing four virtual channels using a Multiplexer (MUX).

This is especially advantageous when a data/GPRS call is ongoing. Using the Multiplexer features, e.g. controlling the module or using the SMS service can be done via the additional channels without disturbing the data flow; access to the second UART is not necessary.

Furthermore, several accesses to the module can be created with the Multiplexer. This is of great advantage when several independent electronic devices or interfaces are used.

To access the three virtual interfaces, both the GSM engine and the customer application must contain MUX components, which communicate over the multiplexer protocol.

In Multiplexer mode, AT commands and data are encapsulated into packets. Each packet has channel identification and may vary in length.

5.4.2. Features

- 3GPP 27.010 CMUX Basic Option used
- CMUX implementation support four full DLCI (Serial Port)
- Every CMUX instance has its own user profile storage in NVM
- Independent setting of unsolicited message.
- Every CMUX instance has its own independent flow control

NOTE: More details about the Multiplexer mode are available in the CMUX User Guide.




5.5. Easy Script Extension - Python interpreter

5.5.1. Overview

The Easy Script Extension is a feature that allows driving the modem "internally", writing the controlling application directly in a nice high level language: Python.

The Easy Script Extension is aimed at low complexity applications where the application was usually done by a small microcontroller that managed some I/O pins and the GL865-DUAL/QUAD through the AT command interface.

A schematic of such a configuration can be:

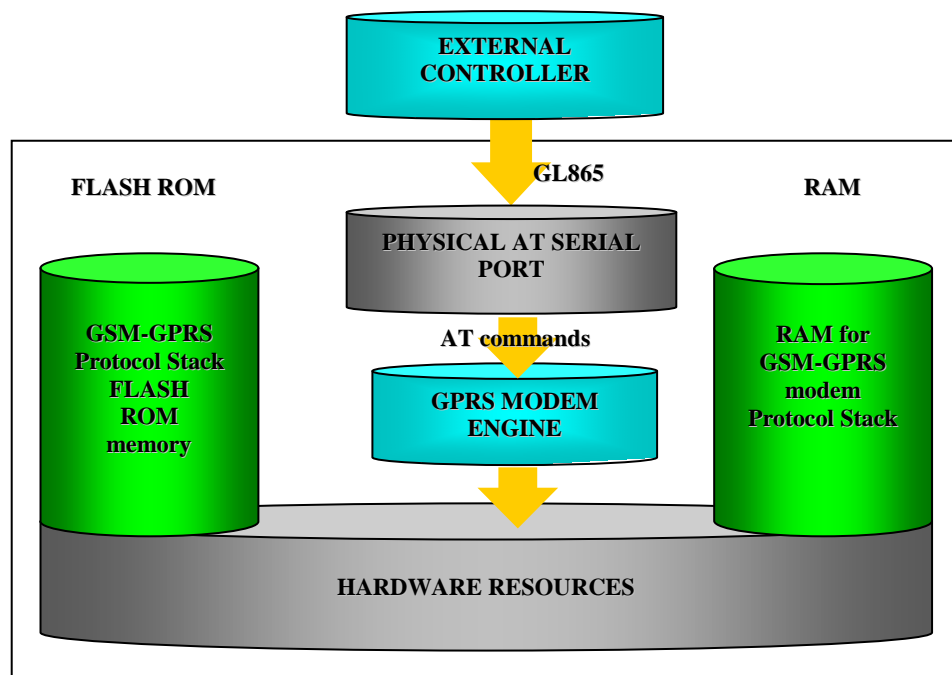

In order to not use any external controller, and further simplify the programming of the sequence of operations, the customer can benefit of these feature already embedded in the GL865:

- Python script interpreter engine v. 1.5.2+
- 1.9 MB of Non Volatile Memory room for the user scripts and data
- 1 MB RAM reserved for Python engine usage



5.5.2. Python 1.5.2+ Copyright Notice

The Python code implemented into the Telit module is copyrighted by Stichting Mathematisch Centrum, this is the license:

Copyright © 1991-1995 by Stichting Mathematisch Centrum, Amsterdam, The Netherlands.
All Rights Reserved

Copyright (c) 1995-2001 Corporation for National Research Initiatives; All Rights Reserved.

Copyright (c) 2001, 2002, 2003, 2004 Python Software Foundation; All Rights Reserved.

Copyright (c) 2001-2008 Python Software Foundation; All Rights Reserved.

All Rights Reserved are retained in Python.

Permission to use, copy, modify, and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appear in all copies and that both that copyright notice and this permission notice appear in supporting documentation, and that the names of Stichting Mathematisch Centrum or CWI or Corporation for National Research Initiatives or CNRI not be used in advertising or publicity pertaining to distribution of the software without specific, written prior permission.

While CWI is the initial source for this software, a modified version is made available by the Corporation for National Research Initiatives (CNRI) at the Internet address <ftp://ftp.python.org>.

STICHTING MATHEMATISCH CENTRUM AND CNRI DISCLAIM ALL WARRANTIES WITH REGARD TO THIS SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS, IN NO EVENT SHALL STICHTING MATHEMATISCH CENTRUM OR CNRI BE LIABLE FOR ANY SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

NOTE: More details about the Python modules are available in the Easy Script in Python User Guide.

5.6. SAP: SIM Access Profile

5.6.1. Architecture

The SAP feature allows the module to use the SIM of a remote SIM Server. This feature is implemented using special AT Command on a Virtual circuit of the CMUX interface.



5.6.2. Implementation features

- SAP is based on 3GPP 27.010 CMUX Basic Option used
- Only SAP Client features
- Logic HW flow control is recommended on the Virtual instance selected for the SAP command.

5.6.3. Remote SIM Message Command Description

The module sends request commands to the client application through a binary message that is crowned in the CMUX message. The client application shall extract the message and send it to the SAP server, through the appropriate protocols (e.g. by RFCOMM, that is the Bluetooth serial port emulation entity).

The client application shall extract all the messages sent by SAP server and put them in the CMUX message, to be sent to the module.

The module fulfills the following feature requirements:

- Connection management
- Transfer APDU
- Transfer ATR
- Power SIM on
- Report Status
- Error Handling



Every feature needs some procedures support:

Feature	Procedure
Connection Management	Connect
	Report Status
	Transfer ATR
	Disconnection Initiated by the Client
	Disconnection Initiated by the Server
Transfer APDU	Transfer APDU
Transfer ATR	Transfer ATR
Power SIM on	Power SIM on
	Transfer ATR
Report Status	Report Status
Error Handling	Error Response

Report Status, Disconnection Initiated by the Server and Error Response are independent messages sent by server. The other procedures consist of couples of messages, started by client.

NOTE: More details about the SAP are available in the SAP User Guide.

5.7. Premium FOTA Management (PFM) Service

The premium FOTA Management Service provides a cost-effective, fast, secure and reliable way for wirelessly reflashing the firmware on mobile devices, ensuring that embedded software is up-to-date with the latest enhancements and features.

Customers, who want to benefit from this service, must pass through the Telit certification program, where Telit will assist the customer in validating the correct implementation of FOTA.

5.7.1. FOTA (Firmware Over The Air)

Telit, which has signed a partnership agreement with the worldwide leader of Firmware OTA technology Red Bend, has integrated its unique vCurrent® Mobile client software for use in its m2m product portfolio. Telit is therefore able to upgrade its products by transmitting only a delta file, which represents the difference between one firmware version and another.

See “PFM Application Note” for details in www.telit.com > Product > GSM/GPRS > Product Family > Application Notes.

5.8. eCall Compliance (GL865-QUAD only)

eCall is a project of the European Commission intended to bring rapid assistance to motorists involved in a collision anywhere in the European Union. The projects aims to employ a hardware black box installed in vehicles that will wirelessly send vehicle location information, time stamp, number of passengers, Vehicle Identification Number (VIN), and other relevant



accident information to local emergency agencies eCall builds on emergency voice call (E112).

The main actors are the IVS (In-Vehicle System) and the PSAP (Public Safety Answering Point). When a collision happens the IVS sends to PSAP the MSD (Minimum Set of Data) via the speech channel of cellular and PSTN networks.

eCall provides reliable full-duplex data communications between IVS and PSAP in addition to emergency voice call, and can be initiated either automatically or manually. The eCall In-band Modem uses the same voice channel as used for the emergency voice call. eCall allows reliable transmission of MSD alternating with a speech conversation through the existing voice communication paths in cellular mobile phone systems.

Telit, understanding the importance of the eCall standard, developed its own eCall in band modem solution. The GL865-QUAD is able to act as IVS in-band modem.

IVS in-band modem functionality is completely transparent because user has only to enable it and manage unsolicited messages coming for AT commands interface.

For a complete description of Telit's eCall solution, please refer to TELIT Solution for eCall Testing Application Note, 80000NT10046a.

5.9. AT Commands

The Telit GL865-DUAL/QUAD module can be driven via the serial interface using the standard AT commands.

The Telit GL865-DUAL/QUAD module is compliant with:

1. Hayes standard AT command set, in order to maintain the compatibility with existing SW programs.
2. 3GPP 27.007 specific AT command and GPRS specific commands.
3. 3GPP 27.005 specific AT commands for SMS (Short Message Service) and CBS (Cell Broadcast Service)


Moreover the GL865-DUAL/QUAD module supports also Telit proprietary AT commands for special purposes.

For a more information about AT commands supported by the GL865-DUAL/QUAD module please refer to document AT Commands Reference Guide.






6. Conformity Assessment Issues


6.1. GE865-DUAL/QUAD CE Declaration of Conformity



EC DECLARATION OF CONFORMITY

1. GL865-QUAD & GL865-DUAL (products name).
2. Telit Communications S.p.A Via Stazione di Prosecco, 5/b 34010 Sgonico (TRIESTE)-ITALY (manufacturer).
3. This declaration of conformity is issued under the sole responsibility of the manufacturer.
4. GSM/GPRS Cellular Mobile Radio Module Quad Band GSM850/EGSM900/DCS1800/PCS1900 & Dual Band EGSM900/DCS1800.



The object of the declaration described above is in conformity with the relevant Community harmonisation: European Directive 1999/05/EC (R&TTE)

5. The conformity with the essential requirements of the 1999/05/EC has been demonstrated against the following harmonized standard:

EN 301 511 V9.0.2	For article 3.2 : Effective use of spectrum allocated
-------------------	---

The product has also been verified against the following harmonized standards:

EN 60950-1:2006 + A11_2009 + CORR:2006 +A1:2010	For article 3.1 (a): Health and Safety of the User
EN 301 489-1 V1.8.1	For article 3.1 (b): Electromagnetic Compatibility
EN 301 489-7 V1.3.1	


7. The conformity assessment procedure referred to in Article 10 and detailed in Annex IV of Directive 1999/05/EC has been followed with the involvement of the following Notified Body for article 3.2:
RFI Global Services Ltd Pavilion A, Ashwood Park, Ashwood Way RG23 8BG BASINGSTOKE United Kingdom
Notified Body Number 0889

Thus, **CE 0889** is placed on the product.


8. The Technical Construction File (TCF) relevant to the product described above and which support this Declaration of Conformity, is held at: Telit Communications S.p.A Via Stazione di Prosecco, 5/b 34010 Sgonico (TRIESTE) ITALY.

Signed on behalf of Telit Communications S.p.A.

Trieste, 2011-11-11



Quality & IPR Director
Guido Walcher



Automotive Quality System Manager
Cesare Robelli

Mod 0216 2011-05 Rev 0 - This Declaration of Conformity is issued in compliance with 768/2008/EC



NOTIFIED BODY OPINION



NOTIFIED BODY STATEMENT OF OPINION
(For Council Directive 1999/5/EC)

This opinion is issued to

Telit Communications S.p.A
Via Stazione di Prosecco 5/B
34010 Sgonico (TS)
Italy

to state that the equipment known as

GL865-QUAD and GL865-DUAL

in our opinion, conforms (following an evaluation of its associated Technical Construction File and subject to any restrictions stated in the attached Annex) with the essential requirements of Annex IV of Council Directive 1999/5/EC on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity, in relation to the essential requirements of :

Article 3.2 Radio Spectrum.

Details of the scope of this opinion, standards used, RF parameters of this equipment and other information necessary for the correct interpretation and application, including any remarks, restrictions or observations that are detailed in the attached Annex.

Signed:

Nick Hooper on behalf of RFI Global Services Ltd.

Issue Date: 19 July 2011

Notified Body
Opinion No: RFI-NOTA1-SC80190JD11



RFI Global Services Ltd
Pavilion A, Ashwood Park, Ashwood Way, Basingstoke, Hampshire, RG23 8BG
Tel: +44 (0)1256 31 2000 Fax: +44 (0)1256 31 2001
Web: www.rfi-global.com Email: contactus@rfi-global.com

NB nr.0889

6.2. GL865- QUAD FCC Certificate

TCB

GRANT OF EQUIPMENT
AUTHORIZATION

TCB

Certification
Issued Under the Authority of the
Federal Communications Commission
By:

RFI Global Services Ltd
Pavilion A Ashwood Park, Ashwood Way
Basingstoke, Hampshire, RG23 8BG United Kingdom
Date of Grant: 08/12/2011
Application Dated: 08/12/2011

Telit Communications S.p.A.
Viale Stazione di Prosecco 5/b
Trieste, 34010
Italy

Attention: Brian Tucker, Global VP, Quality

NOT TRANSFERABLE

EQUIPMENT AUTHORIZATION is hereby issued to the named GRANTEE, and is VALID ONLY for the equipment identified herein for use under the Commission's Rules and Regulations listed below.

FCC IDENTIFIER: R17GL865Q

Name of Grantee: Telit Communications S.p.A.

Equipment Class: PCS Licensed Transmitter

Notes: Quadband GSM/ GPRS Module

Grant Notes	FCC Rule Parts	Frequency Range (MHz)	Output Watts	Frequency Tolerance	Emission Designator
	22H	824.2 - 848.8	1.7	52.0 Hz	300KGXW
	24E	1850.2 - 1909.8	0.76	71.0 Hz	300KGXW

Single modular approval. Power Output listed is conducted. This device contains functions that are not operational in U.S. Territories. This filing is only applicable for US operations. The antenna(s) used for this transmitter must be installed to provide a separation distance of at least 25cm from all persons and must not transmit simultaneously with any other antenna transmitter, except in accordance with FCC multi-transmitter product procedures. The antenna gain used, including cable loss, must not exceed 5.0 dBi at 1900 MHz / 1.4 dBi at 850 MHz as defined in 2.1091 and 2.1097 of the rules for satisfying RF exposure compliance. OEM integrators must supply specific operating instructions and antenna installation instructions for end-users and installers to satisfy RF exposure compliance requirements. This module can only be used with a host antenna circuit trace layout design in strict compliance with the OEM instructions provided. The use of a different trace layout other than approved requires a Class II Permissive Change or a new application as appropriate. Installation of this device into portable RF Exposure category host devices requires the submission of a Class II permissive change or new application as appropriate. Compliance of this device in all final product configurations is the responsibility of the Grantee.



6.3. GL865-QUAD IC Certificate

**Certification & Engineering Bureau**

3701 Carling Avenue
Bldg. 94
P.O. Box 11490 Station "H"
Ottawa, Ontario
K2H 8S2

October 18, 2011

TELIT COMMUNICATIONS S.p.A.

Via Stazione Di Prosecco 5/B
Trieste,
34010 Italy

Attention: Andrea Fragiaco

Dear Sir/Madame,

I have reviewed the test report and related documents, and am pleased to advise that this device meets our procedural and specification requirements for certification. The field offices have been notified.

The assigned certification number and the model number must be shown on each equipment model. This certification identification information may be shown on the equipment model identification plate or on a separate label that shall be indelible and tamper proof. The certification number shall be prefixed with the letters "IC:". Radio equipment is certified as described on the attached certification certificate.

Certificate(s) are attached for the following model(s):

GL865-QUAD

Sincerely




Yi Pan
Technical Officer
Certification Section


Canada 




6.4. GL865-DUAL/QUAD RoHS Declaration of Conformity



EU RoHS DECLARATION OF CONFORMITY



1. GL865-QUAD & GL865-DUAL (products name).
2. Telit Communications S.p.A Via Stazione di Prosecco, 5/b 34010 Sgonico (TRIESTE)-ITALY (manufacturer).
3. This declaration of conformity is issued under the sole responsibility of the manufacturer.
4. GSM/GPRS Cellular Mobile Radio Module Quad Band & Dual Band.




5. The products described above are in conformity with EU Community harmonisation 2002/95/CE (EU-ROHS Directive) on Restriction of the use of certain Hazardous Substances in electrical and electronic equipment (RoHS), subsequent amendments and the European Court of Justice decision on Deca-BDE substances from July 1, 2008.

6. This information represents Telit's knowledge and belief as of the date that it is provided. Telit bases its material content knowledge on information provided by third parties and has taken and continues to take commercially reasonable steps to provide representative and accurate information, but may not have conducted chemical analysis on incoming materials and chemicals.

The documents relevant to the products described above and which support this Declaration of Conformity, are held at Telit Communications S.p.A Via Stazione di Prosecco, 5/b 34010 Sgonico (TRIESTE) ITALY that managed the compliance assessment process.

Signed on behalf of Telit Communications S.p.A.

Trieste, **2011-06-16**



Quality System Manager
Cesare Robelli

Mod 0216 2011-06 Rev.0 - This Declaration of Conformity is issued in compliance with 768/2008/EC



7. SAFETY RECOMMENDATIONS

READ CAREFULLY

Be sure the use of this product is allowed in the country and in the environment required. The use of this product may be dangerous and has to be avoided in the following areas:

- Where it can interfere with other electronic devices in environments such as hospitals, airports, aircrafts, etc
- Where there is risk of explosion such as gasoline stations, oil refineries, etc

It is responsibility of the user to enforce the country regulation and the specific environment regulation.

Do not disassemble the product; any mark of tampering will compromise the warranty validity.

We recommend following the instructions of the hardware user guides for a correct wiring of the product. The product has to be supplied with a stabilized voltage source and the wiring has to be conforming to the security and fire prevention regulations.

The product has to be handled with care, avoiding any contact with the pins because electrostatic discharges may damage the product itself. Same cautions have to be taken for the SIM, checking carefully the instruction for its use. Do not insert or remove the SIM when the product is in power saving mode.

The system integrator is responsible of the functioning of the final product; therefore, care has to be taken to the external components of the module, as well as of any project or installation issue, because the risk of disturbing the GSM network or external devices or having impact on the security. Should there be any doubt, please refer to the technical documentation and the regulations in force.

Every module has to be equipped with a proper antenna with specific characteristics. The antenna has to be installed with care in order to avoid any interference with other electronic devices and has to guarantee a minimum distance from the body (20 cm). In case of this requirement cannot be satisfied, the system integrator has to assess the final product against the SAR regulation.

The European Community provides some Directives for the electronic equipments introduced on the market. All the relevant information's are available on the European Community website:

<http://ec.europa.eu/enterprise/rtte/dir99-5.htm>

The text of the Directive 99/05 regarding telecommunication equipments is available, while the applicable Directives (Low Voltage and EMC) are available at:

http://ec.europa.eu/enterprise/electr_equipment/index_en.htm



8. List of acronyms

ACM	Accumulated Call Meter
ASCII	American Standard Code for Information Interchange
AT	Attention commands
CB	Cell Broadcast
CBS	Cell Broadcasting Service
CCM	Call Control Meter
CLIP	Calling Line Identification Presentation
CLIR	Calling Line Identification Restriction
CMOS	Complementary Metal-Oxide Semiconductor
CR	Carriage Return
CSD	Circuit Switched Data
CTS	Clear To Send
DAI	Digital Audio Interface
DCD	Data Carrier Detected
DCE	Data Communications Equipment
DRX	Data Receive
DSR	Data Set Ready
DTA	Data Terminal Adaptor
DTE	Data Terminal Equipment
DTMF	Dual Tone Multi Frequency
DTR	Data Terminal Ready
EMC	Electromagnetic Compatibility
ETSI	European Telecommunications Equipment Institute
FTA	Full Type Approval (ETSI)
GPRS	General Radio Packet Service
GSM	Global System for Mobile communication
HF	Hands Free
IMEI	International Mobile Equipment Identity
IMSI	International Mobile Subscriber Identity
IRA	International Reference Alphabet
ITU	International Telecommunications Union
IWF	Inter-Working Function
LCD	Liquid Crystal Display
LED	Light Emitting Diode
LF	Linefeed
ME	Mobile Equipment
MMI	Man Machine Interface
MO	Mobile Originated
MS	Mobile Station
MT	Mobile Terminated
OEM	Other Equipment Manufacturer
PB	Phone Book



PDU	Protocol Data Unit
PH	Packet Handler
PIN	Personal Identity Number
PLMN	Public Land Mobile Network
PUCT	Price per Unit Currency Table
PUK	PIN Unblocking Code
RACH	Random Access Channel
RLP	Radio Link Protocol
RMS	Root Mean Square
RTS	Ready To Send
RI	Ring Indicator
SCA	Service Center Address
SIM	Subscriber Identity Module
SMD	Surface Mounted Device
SMS	Short Message Service
SMSC	Short Message Service Center
SS	Supplementary Service
TIA	Telecommunications Industry Association
UDUB	User Determined User Busy
USSD	Unstructured Supplementary Service Data



9. Document History

Revision	Date	Changes	Location
0	2010-09-02	First issue	Trieste
1	2010-05-06	Consolidated version with GL865-QUAD	Trieste
2	2011-07-13	Applied new template Added 5.8 “eCall Compliance”	Trieste
3	2013-01-09	Updated 6 “Conformity Assessment Issues”	Trieste

